




## Pneumatic Actuator AT Series




## Components and materials, corrosion ATD/ATS 32 -400

### Model preparation

AT-160 S-K10 F10/12 P27-90-B-A

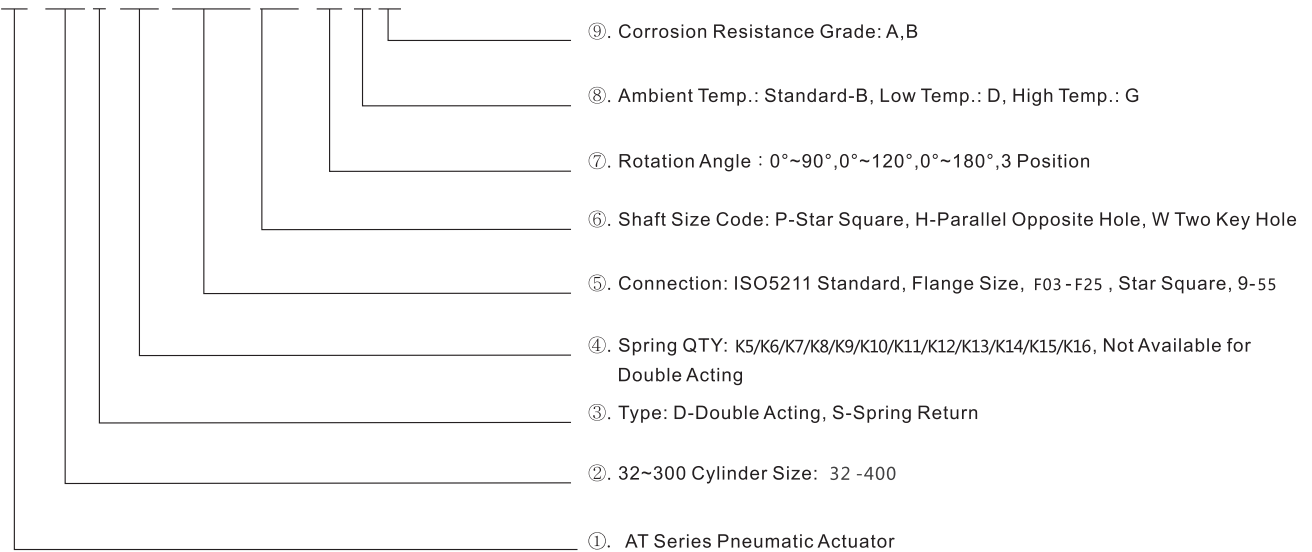

### Components and materials, corrosion

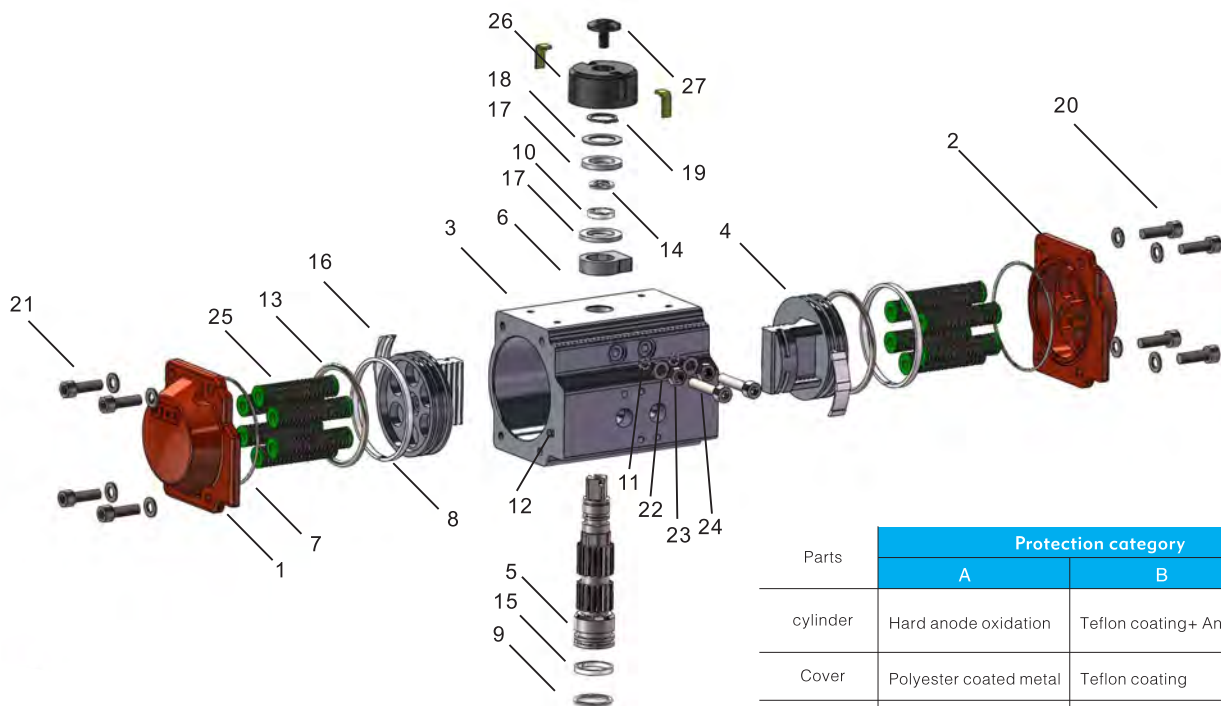


Parts	Protection category	
	A	B
cylinder	Hard anode oxidation	Teflon coating+ Anode sclerosis
Cover	Polyester coated metal	Teflon coating
Output shaft	Carbon steel electroless nickel plating	Electroless nickel plating or stainless steel
Use Occasion	General situation	General occasions or low concentrations of acidic environment

# Pneumatic Actuator AT Series

Part Number	Each number	Part Name	Standard Materials	Selected materials
01	1	Left Cover	Aluminum Die Casting	Stainless steel
02	1	Right Cover	Aluminum Die Casting	Stainless steel
03	1	body	Aluminum extrusion	Stainless steel
04	2	Piston	Aluminum Die Casting	----
05	1	Output shaft	Carbon Steel	Stainless steel
06	1	Cam adjustment	Stainless steel	----
07 *	2	O-ring (cover)	NBR	Fluorine or silicone rubber
08 *	2	O-ring (Piston)	NBR	Fluorine or silicone rubber
09 *	1	O-ring (output shaft bottom)	NBR	Fluorine or silicone rubber
10 *	1	O-ring (output shaft at the top)	NBR	Fluorine or silicone rubber
11 *	2	O-ring (adjusting screw)	NBR	Fluorine or silicone rubber
12 *	2	Plug (Cylinder)	NBR	Fluorine or silicone rubber
13 *	2	Bearing (Piston)	POM	----
14 *	1	Bearing (output shaft at the top)	POM	----
15 *	1	Bearing (output shaft bottom)	POM	----
16 *	1	Guide with Bearing (Piston back)	POM	----
17 *	2	Thrust bearings (output shaft)	POM	----
18	2	Gasket (output shaft)	Stainless steel	----
19	1	Flexible file ring	Spring steel	----
20	4	Cover bolt	Stainless steel	----
21	4	Cover Gasket	Stainless steel	----
22	2	Gasket	Stainless steel	----
23	2	Nut	Stainless steel	----
24	2	Adjustment bolt	Stainless steel	----
25	5-12	Spring Components	Alloy spring steel	----
26	1	Position indicator	POM	----
27	1	Screw of indicator	POM	----

## Torque Diagram

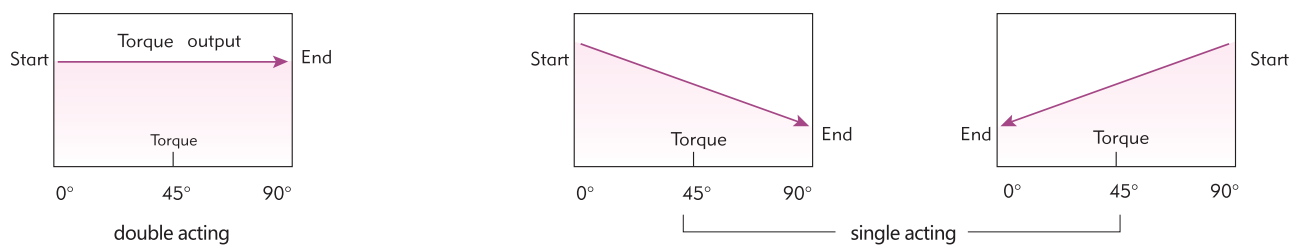

## Double Acting Operation


Selection of double action actuators

The suggested safety factor for double acting actuators under normal working conditions is 20%-30%



Example:

- The torque needed by valve = 100 N.m
- The torque considered safety factor  $100 \times (1 + 30\%) = 130 \text{ N.m}$
- Air Supply = 5 Bar

According to double acting torque table, we can choose the minimum model is AT-100D.

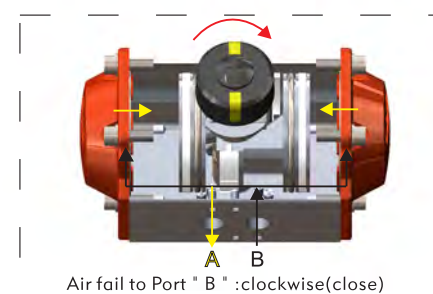

# Pneumatic Actuator AT Series

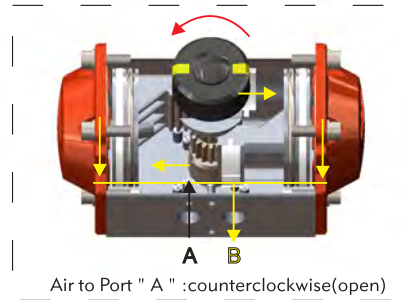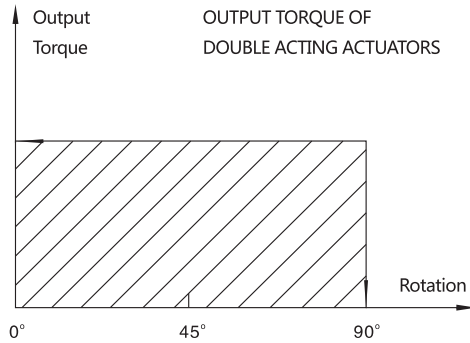

\* Pistons must be inverted to reverse actuator rotation

## Spring Return Operation

Selection of single action actuators

Under normal operating conditions, a single actuator to consider the role of the safety factor of 30% -50%.

For example:

Valve required torque = 100N.m

Safety torque =  $100 \times (1 + 30\%) = 130\text{N.m}$

according to single acting actuator output torque table, we can find AT-145S K10

Torque following

Implementation process 0° = 285N.m air

Implementation process 90° = 164 N.m air



Spring stroke 0° = 193 N.m

Spring stroke 90° = 314 N.m

output Torque bigger than all our needs

Note:

Single action during the spring return actuators, actuator B hole ventilation does not affect actuator output torque.instead it's helpful of spring return

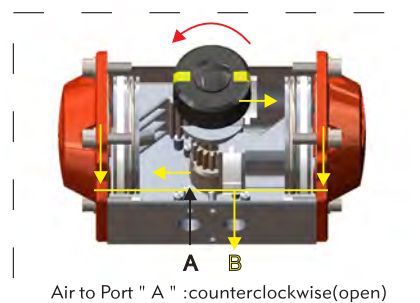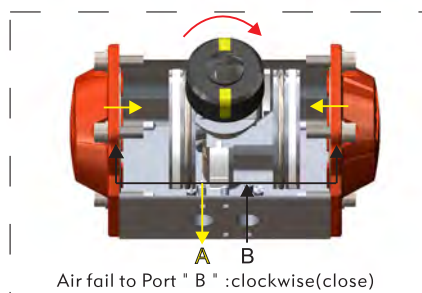


\* Spring force makes the actuator clockwise when the air is exhausted at port " A "

\* When air fail to counterclockwise is required, the pistons must be inverted

## Sizing information and How to order

### Sizing information and How to order

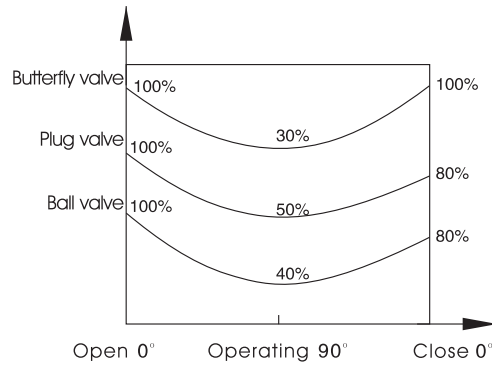

Forexample:

Butterfly of the original maximum torque=80N.m

Opened torque  $80 \times 30\% = 24\text{N.m}$

Air pressure = 5.5 Bar

We can choose AT-115SK10

Air travel  $0^\circ = 141\text{N.m} > 80\text{N.m}$

Air travel  $90^\circ = 81\text{N.m} > 24\text{N.m}$


Spring stroke  $90^\circ = 155\text{N.m} > 24\text{N.m}$

Spring stroke  $0^\circ = 95.3\text{N.m} > 80\text{N.m}$


The above figures show opening meet of the butterfly valve

### Operating type (Double acting and spring return)

Air supply connection is designed in accordance with NAMUR Standard to install solenoid valves.




The Namur drive pinion and the Namur top mounting connection permit direct installation of accessories such as limit switch box and positioner.



Bottom mounting connection is designed in accordance with ISO5211, DIN3337 standards for direct mounting with valve gear boxes or mounting brackets.



### Operating conditions:



#### 1. Operating media

Dry or lubricated air, or the non-corrosive gases

The maximum particle diameter must be less than  $30\ \mu\text{m}$

#### 2. Air supply pressure

The minimum supply pressure is 2.5 Bar

The maximum supply pressure is 8 Bar

#### 3. Operating temperature

Standard:  $-20^\circ\text{C} \sim +80^\circ\text{C}$

Low temperature:  $-40^\circ\text{C} \sim +80^\circ\text{C}$

High temperature:  $-15^\circ\text{C} \sim +150^\circ\text{C}$

#### 4. Travel adjustment

Have adjustment range of  $\pm 5^\circ$  for the rotation at  $0^\circ$  and  $90^\circ$

#### 5. Application

Either indoor or outdoor

## Air Consumption

### Air Consumption

Model	Maximum pressure	The angle of rotation	Temperature	1*the need to adjust the number of laps	Diameter	Internal volume close	Open	On-off time close	Open	kgs/per A weight	Weight Spring weight
SPA-50	Lubrication or dry of compressed air 8bar	(0°-90°) ± 5° or full itinerary 0°-90°	B (normal) NBR O-ring -20~+80°C G(High Temperature) Viton O-ring -15~+150°C D (Low Temperature) Silicone O-ring -40~+80°C	1/6	50	0.1	0.2	DA 0.6 SR 2.0	DA 0.6 SR 0.5	DA 1.10 SR 1.15	... 0.010
SPA-63				1/6	63	0.2	0.3	DA 0.7 SR 2.0	DA 0.7 SR 1.0	DA 1.62 SR 1.80	... 0.015
SPA-75				1/5	75	0.3	0.5	DA 0.8 SR 2.0	DA 0.7 SR 1.0	DA 2.75 SR 3.15	... 0.036
SPA-88				1/5	88	0.5	0.8	DA 0.9 SR 2.5	DA 0.8 SR 1.0	DA 3.80 SR 4.40	... 0.046
SPA-100				1/5	100	0.7	1.1	DA 1.0 SR 3.0	DA 1.0 SR 1.0	DA 5.20 SR 5.95	... 0.050
SPA-115				1/4	115	1.2	1.8	DA 1.5 SR 3.0	DA 1.5 SR 1.0	DA 7.85 SR 9.05	... 0.094
SPA-125				1/4	125	1.5	2.3	DA 2.0 SR 4.0	DA 2.0 SR 1.0	DA 10.00 SR 12.00	... 0.150
SPA-145				1/4	145	2.4	3.8	DA 2.5 SR 4.0	DA 2.5 SR 1.0	DA 14.70 SR 17.20	... 0.200
SPA-160				1/4	160	3.1	4.9	DA 4.0 SR 4.0	DA 3.0 SR 1.5	DA 20.85 SR 24.45	... 0.300
SPA-190				1/4	190	4.5	7.3	DA 5.0 SR 5.0	DA 4.0 SR 3.0	DA 31.05 SR 36.80	... 0.479
SPA-210				1/4	210	6.8	11.2	DA 5.0 SR 6.0	DA 5.0 SR 3.0	DA 39.00 SR 45.50	... 0.500
SPA-240				1/4	240	10	15.2	DA 6.0 SR 12	DA 6.0 SR 4.0	DA 53.00 SR 64.00	... 0.917
SPA-270				1/4	270	14.5	21.4	DA 8.0 SR 15	DA 8.0 SR 6.0	DA 76.00 SR 95.20	... 1.600
SPA-300				1/4	300	23.8	29.7	DA 12 SR 18	DA 12 SR 8.0	DA 100.0 SR 128.2	... 2.350
SPA-350				1/4	350	35.1	46	DA 14 SR 20	DA 14 SR 10	DA 186.0 SR 216.0	... 2.501
SPA-400				1/4	400	52.6	56	DA 15 SR 25	DA 15 SR 12	DA 243.0 SR 279.0	... 3.001

Air consumption rest with Supply. Air volume and Action cycle times,expressions

$$L/Min = \text{Air volume}(\text{Air volume Opening} + \text{Air volume closing}) \times [(\text{Air Supply}(Kpa) + 101.3) \div 101.3] \times \text{Action cycle times}(/min)$$

### Common faults and inspection, troubleshooting

Failure phenomenon	Inspection Items	Solution
Pneumatic valve can not move	1, the electromagnetic valve is normal, coil is burned, Electromagnetic valve is stuck being stolen	Solenoid valve replacement, replacement coils, remove stolen property.
	2, a separate air supply pneumatic actuator test, check seals and Whether the cylinder is damaged.	Replace a bad ring and cylinder.
	3, there are impurities in the spool valve stuck.	Remove impurities, replace damaged parts.
	4, the handle in a manual motor location.	change the handle to pneumatic position
Slow motion, crawling	1, supply pressure is not enough.	The increase of gas supply pressure (0.4-0.7Mpa)
	2, pneumatic actuator output torque is too small.	Increase the pneumatic actuator Production.
	3, the valve spool or valve assembly too tight.	Re-assembly adjustments.
	4, air supply pipe plug, flow is too small.	Exclude plug, replace the filter cartridge.
Reply devices without signal	1, power line short circuit or open circuit.	Maintenance of power lines.
	2, reply within the cam position is not accurate.	Adjust the cam to the correct location
	3, micro switch damaged.	Replacement Micro Switch

## RT Series stainless steel pneumodic auuator

### Designing features



ASTM316L, 316, 304, 303 stainless steel pneumatic actuator with electro-polish finish offer excellent resistance to most corrosive chemicals as well as industrial atmospheres.

Dual piston rack and pinion design for compact construction, symmetric mounting position, high-cycle life and fast operation, reverse rotation can be accomplished in the field by simply inverting the pistons.

Multiple bearings and guides on racks and pistons, low friction, high cycle life and prevent shaft blowout.


Modular preloaded spring cartridge design, with coated spring for simple versatile range, greater safety and corrosion resistance, longer cycle life.

Fully machined teeth on piston and pinion for accurate low backlash rack and pinion engagement, maximum efficiency.

Stainless steel fasteners for long term corrosion resistance.

Full conformance to the latest specifications: ISO5211, DIN 3337 and Namur or product interchangeability and easy mounting of solenoids, limit switches and other accessories.


### RT Series Actuators Parts and Material Table

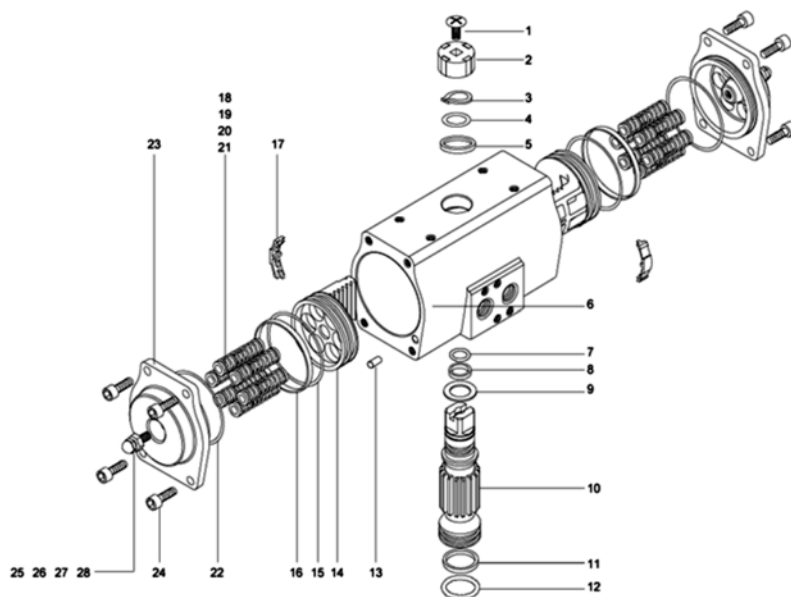

Number	Description	Qty	Standards Material
1	Indicator screw	1	POM
2	Indicator	1	POM
3	Snap ring	1	Spring steel
4	Washer	1	Stainless steel
5	Trust bearing	1	POM
6	Body	1	Stainless steel
7	O-ring(top)	1	Viton/NBR
8	Bearing top	1	POM
9	Trust bearing	1	POM
10	Pinion	1	Stainless steel
11	Bearing bottom	1	POM
12	O-ring Bottom	1	Viton/NBR
13	Plug	2	NBR
14	Piston	2	Stainless steel
15	Piston O-ring	2	Viton/NBR
16	Piston Bearing	2	POM
17	Guide Piston	2	POM
18	Spring	*	Spring Steel
19	Spring Retainer(L)	*	Nylon 66
20	Spring Retainer(R)	*	Nylon 66
21	Retainer Connector	*	Brass
22	End-Cap O-ring	2	Viton/NBR
23	End-Cap	2	Stainless steel
24	End-Cap Stop Screw	8	Stainless steel
25	Adjust Screw	2	Stainless steel
26	Adjust Screw Nut	2	Stainless steel
27	Adjust Screw Washer	2	Stainless steel
28	Adjust Screw O-ring	2	Viton/NBR

# RT Series stainless steel pneumodic auuator

## RT Series Actuators Parts and Material Table

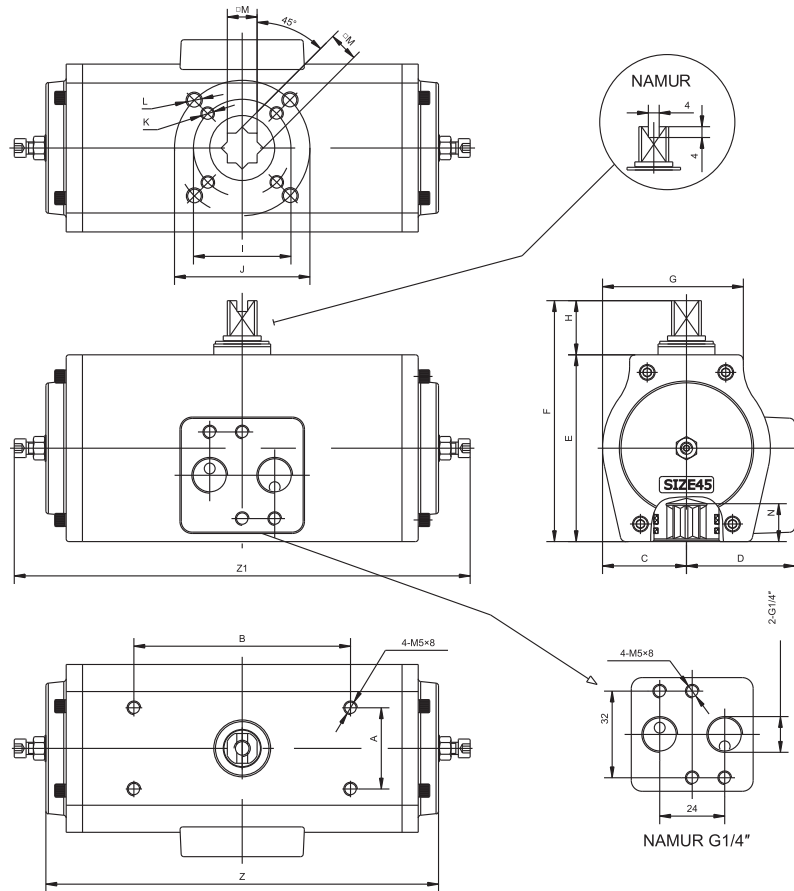

Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	Z	Z1	Air
RT-45	30	80	31	39	68	88	52	20	36	50	M5×7	M6×8	11	14	145	165	1/4"NPT
RT-60	30	80	38	47	84	104	64	20	36	50	M5×8	M6×10	14	15.5	165	185	1/4"NPT
RT-85	30	80	49.5	53	107	127	76.5	20	50	70	M6×10	M8×12	17	20	200		1/4"NPT
RT-105	30	80	58	63.5	134	154	88	20	70	102	M8×13	M10×16	22	26	252		1/4"NPT
RT-125	30	130	69	68.5	157	187	100.5	30	70	102	M8×13	M10×16	22	29	338		1/4"NPT
RT-140	30	130	79.5	80	178	208	122	30	102	125	M10×16	M12×20	27	30	393		1/4"NPT
RT-160	30	130	90	90	200	230	146	30	102	125	M10×18	M12×18	27	30	442	475	1/4"NPT
RT-210	30	130	122	110	257	287	184	30		140		M16×20	36	40	596	628	1/4"NPT

## RT Double Acting Actuator Output Torque(Nm) For Double Acting Actuators

Model	Air supply pressure(Unit:Bar)									
	2.5	3	3.5	4	4.5	5	5.5	6	7	8
RT-45D	8.3	10.0	11.6	13.3	15.0	16.6	18.3	20.0	23.3	26.6
RT-60D	14.6	17.6	20.5	23.4	26.4	29.3	32.2	35.2	41.0	47.0
RT-85D	43.3	52.0	60.7	69.3	78.0	86.7	95.3	104	121	139
RT-105D	81.4	97.6	114	130	146	163	179	195	228	260
RT-125D	138	166	194	221	249	277	304	332	387	443
RT-140D	217	261	304	348	391	434	478	521	608	695
RT-160D	283	340	397	453	510	577	623	680	793	907
RT-210D	683	820	957	1093	1230	1367	1503	1640	1913	2187



# Pneumatic Actuator

## Single Acting Actuator Output Torque(Nm)


Model	Air pressure		2.5bar		3bar		3.5bar		4bar		4.5 bar		5 bar		5.5 bar		6 bar		7 bar		8 bar		Spring Torque							
	Spring Q.ty	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	90°	0°							
SPA-50	5	4.6	2.3	6.3	4	7.9	5.6	9.6	7.3	11.3	9	12.9	10.6	13.9	11.1	14.8	11.6	17.4	13.7	20	15.8	12.2	6	3.7						
	6	3.9	1.1	5.6	2.8	7.2	4.4	8.9	6.1	10.6	7.8	12.2	9.4	12.2	9.4	13.9	11.1	14.8	11.6	17.4	13.7	20	15.8	12.2						
	7			4.8	1.6	6.4	3.2	8.1	4.9	9.8	6.6	11.4	8.2	13.1	9.9	14.8	11.6	17.4	13.7	20	15.8	12.2	6	3.7						
	8					7.4	3.7	9.1	5.4	10.7	7	12.4	8.7	14.1	10.4	17.4	13.7	20	15.8	12.2	6	3.7	6	3.7						
	9							6.7	2.5	8.4	4.2	10	5.8	11.7	7.5	13.4	9.2	16.7	12.5	15.8	12.2	6	3.7	6	3.7					
	10									7.4	3.7	9.1	5.4	10.7	7	12.4	8.7	14.1	10.4	17.4	13.7	20	15.8	12.2	6	3.7				
	11									6.7	2.5	8.4	4.2	10	5.8	11.7	7.5	13.4	9.2	16.7	12.5	15.8	12.2	6	3.7					
	12											7.6	3.7	9.1	5.4	10.7	7	12.4	8.7	14.1	10.4	17.4	13.7	20	15.8	12.2				
	SPA-63	5	8.1	4	11.1	7	14	9.9	16.9	12.8	19.9	15.8	22.8	18.7	24.4	19.5	26.1	20.4	30.6	24	35.3	28	33.4	10.6	6.5					
		6	6.8	1.9	9.8	4.9	12.7	7.8	15.6	10.7	18.6	13.7	21.5	16.6	23.1	17.4	24.8	18.2	28.3	22	33.4	28	33.4	10.6	6.5					
		7			8.5	2.8	11.4	5.7	14.3	8.6	17.3	11.6	20.2	14.5	23.1	17.4	24.8	18.2	28.3	22	33.4	28	33.4	10.6	6.5					
		8					10.1	3.5	13	6.4	16	9.4	18.9	12.3	21.8	15.2	23.5	16.2	29.3	22	33.4	28	33.4	10.6	6.5					
9								11.7	4.4	13.4	5.2	17.6	10.3	20.5	13.2	23.5	16.2	29.3	22	33.4	28	33.4	10.6	6.5						
10												16.3	8.1	19.2	11	22.2	14	28	19.8	34	25.8	35.3	28	33.4	10.6	6.5				
11												15	6	17.9	8.9	20.9	11.9	26.7	17.7	32.7	23.7	32.7	23.7	32.7	10.6	6.5				
12														16.6	6.8	19.6	9.8	25.4	15.6	31.4	21.6	31.4	21.6	31.4	10.6	6.5				
SPA-75		5	16.1	8	22.1	14	27.8	19.7	33.6	25.5	39.4	31.3	45.2	37.1	48.5	38.8	51.7	40.3	60.8	47.8	69.8	55.2	71.6	21	12.9					
		6	13.5	3.8	19.5	9.8	25.2	15.5	31	21.3	36.8	27.1	42.6	32.9	46	34.6	51.7	40.3	60.8	47.8	69.8	55.2	71.6	21	12.9					
		7			17	5.6	22.7	11.3	28.5	17.1	34.3	23.9	40.1	28.7	44	34.6	49.1	30.4	60.8	47.8	69.8	55.2	71.6	21	12.9					
		8					20.1	7.1	23.3	8.7	29.1	14.5	34.9	20.3	40.8	26.2	46.5	31.9	58.2	43.6	69.8	55.2	71.6	21	12.9					
	9											26.5	10.3	32.3	16.1	38.2	22	43.9	27.7	55.6	39.4	67.2	51	42	21	12.9				
	10													29.8	11.9	35.7	17.8	41.4	23.5	53.1	35.2	64.7	46.8	62	42	21	12.9			
	11															33.1	13.6	38.8	19.3	50.5	31	62.1	42.6	50.4	42	21	12.9			
	12																									21	12.9			
	SPA-88	5	25.5	12.7	34.8	22	43.8	31	53	40.2	62.1	49.3	71.2	58.4	76.7	61.4	81.7	63.7	95.6	75.1	110	86.5	102	33	20.2					
		6	21.4	6.1	30.7	15.4	39.7	24.4	48.9	33.6	58	42.7	67.1	51.8	63.1	45.1	72.7	54.7	81.7	63.7	95.6	75.1	110	86.5	33	20.2				
		7			26.7	8.7	35.7	17.7	44.9	26.9	54	36	63.1	45.1	59	38.5	68.6	48.1	77.6	57.1	95.6	75.1	110	86.5	33	20.2				
		8					31.6	11.1	40.8	20.3	49.9	29.9	55	31.9	64.6	41.5	73.6	50.5	91.6	68.5	110	86.5	102	73.3	33	20.2				
9								36.8	13.7	45.9	22.8	55	31.9	64.6	41.5	73.6	50.5	91.6	68.5	110	86.5	102	73.3	33	20.2					
10										41.8	16.3	50.9	18.7	56.5	28.3	65.5	37.3	83.5	55.3	102	73.3	102	73.3	33	20.2					
11																										33	20.2			
12																											33	20.2		
SPA-100		5	37	18.4	50.3	31.7	63.6	45	76.6	58	90.6	72	103.6	85	111	88.3	118	91.7	139	109	160	127	142	48	29.4					
		6	31.1	8.7	44.4	22	57.7	35.3	70.7	48.3	84.7	62.3	97.7	75.3	105	78.7	118	91.7	139	109	160	127	142	48	29.4					
		7			38.5	12.4	46	16.1	59	29.1	73	43.1	86	56.1	99	69.1	112	82.1	133	99.5	160	127	142	48	29.4					
		8							53	19.5	61.1	24	74.1	37	87.1	50	106	72.5	133	99.5	160	127	142	48	29.4					
	9																									48	29.4			
	10																										48	29.4		
	11																											48	29.4	
	12																												48	29.4
	SPA-115	5	59.4	29.3	81.4	51.3	102.4	72.3	124	94.3	145	115	167	137	179	143	191	149	225	177	258	204	249	77.7	47.6					
		6	49.8	13.8	71.8	35.8	92.8	56.8	115	78.8	136	100	158	127	169	127	182	134	225	177	258	204	249	77.7	47.6					
		7			62.3	20	83.3	41	105	63	126	84	148	106	179	127	218	158	258	199	258	204	249	77.7	47.6					
		8					73.8	26	95.8	48	126	84	148	106	179	127	218	158	258	199	258	204	249	77.7	47.6					
9								86.3	32	107	53	120	60	141	81	163	103	206	146	249	189	155	171	77.7	47.6					
10										98	38	110	44	131	65	153	87	196	130	239	173	155	171	77.7	47.6					
11														122	50	144	72	187	115	230	158	186	114	77.7	47.6					
12																										77.7	47.6			
SPA-125		5	76.7	38	104.7	66	132.7	94	160	121	188	149	216	177	230	184	246	192	289	227	333	263	320	100	61.3					
		6	64.4	18	92.4	46	120.4	74	147	101	175	129	203	157	230	184	246	192	289	227	333	263	320	100	61.3					
		7			80.2	26	108.2	54	135	81	163	109	191	137	218	164	234	172	289	227	333	263	320	100	61.3					
		8					96	34	123	61	151	89	179	117	206	144	234	172	289	227	333	263	320	100	61.3					
	9							111	41	139	69	167	97	194	124	222	152	277	207	333	263	320	100	61.3						
	10									126	49	154	77	181	104	209	132	264	187	320	243	200	123	100	61.3					
	11											142	57	169	84	197	112	252	167	308	223	220	135	100	61.3					
	12																									100	61.3			
	SPA-145	5	120.7	60	164.7	104	207.7	147	252	191	295	234	338	277	377	301	454	361	553	465	681	538	663	205	125					
		6	101	29	145	73	188	116	232	160	275	203	318	246	362	290	426	344	522	435	641	502	618	205	125					
		7			126	41	150	53	194	97	237	148	261	183	324	227	367	270	454	357	522	412	515	205	125					
		8							175	65	218	108	241	120	305	195	348	238	435	325	522	412	515	205	125					
9										198	77	222	88	266	132	309	175	396	262	483	349	346	212	205	125					
10														247	101	290	144	377	231	464	318	318	220	205	125					
11																										205	125			
12																											205	125		
SPA-160		5	158	78	215	135	272	192	328	248	385	305	452	372	504	393	593	465	681	538	811	641								

# Pneumatic Actuator

## Double Acting Actuator Output Torque(Nm)

Model	Air supply pressure(Uni t : Bar)									
	2.5	3	3.5	4	4.5	5	5.5	6	7	8
DPA-32	3.8	4.5	5.3	6.0	6.8	7.5	8.3	9.0	10.5	12.0
DPA-50	8.3	10.0	11.6	13.3	15.0	16.6	18.3	20.0	23.3	26.6
DPA-63	14.6	17.6	20.5	23.4	26.4	29.3	32.2	35.2	41.0	47.0
DPA-75	29.0	35.0	40.7	46.5	52.3	58.1	64.0	69.7	81.4	93.0
DPA-88	45.7	55.0	64.0	73.2	82.3	91.4	101	110	128	146
DPA-100	66.4	79.7	93.0	106	120	133	146	159	186	213
DPA-115	107	129	150	172	193	215	236	258	301	344
DPA-125	138	166	194	221	249	277	304	332	387	443
DPA-145	217	261	304	348	391	434	478	521	608	695
DPA-160	283	340	397	453	510	577	623	680	793	907
DPA-190	533	640	746	853	959	1066	1173	1279	1492	1706
DPA-210	651	781	911	1042	1172	1302	1432	1562	1823	2083
DPA-240	957	1148	1339	1530	1722	1913	2104	2296	2678	3061
DPA-270	1452	1743	2033	2324	2614	2905	3195	3486	4067	4648
DPA-300	1993	2391	2790	3188	3587	3985	4384	4782	5579	6376
DPA-350	2983	3580	4176	4773	5369	5966	6563	7159	8352	9546
DPA-400	4250	5100	5950	6800	7650	8500	9350	10200	11900	13600

## Dimensional Drawing

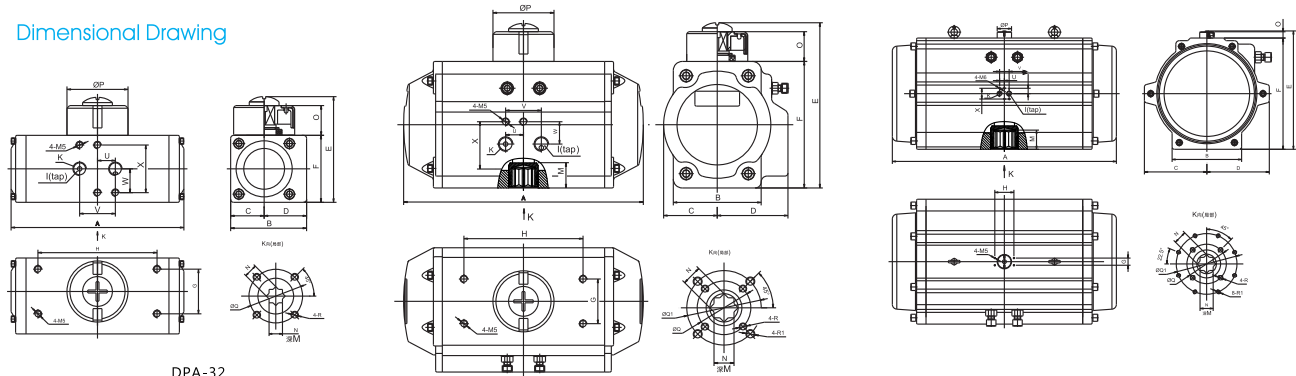

DPA-32

DPA-400


## Dimension

Unit (mm)

Model	FLANGE L(ISO5211) Q/Q1	R/R1 M/N(min)	A	B	C	D	E	F	G	H	I	K	O	P	U	V	W	X
			PA-32	F03 Ø36	M5 10/9	118	51	22.5	28.5	69	45	30	80	PF	1/8"	20	42	12
PA-50	F03/F05 Ø36/Ø50	M5/M6 13/11	146	47	29	41.5	95	69	30	80	PF	1/4"	20	42	12	24	16	32
	F03/F05 Ø36/Ø50	M5/M6 16/14																
PA-75	F05/F07 Ø50/Ø70	M6/M8 19/17	214	68	43	51	128	102	30	80	PF	1/4"	20	42	12	24	16	32
	F05/F07 Ø50/Ø70	M6/M8 20/17																
PA-100	F07/F10 Ø70/Ø102	M8/M10 24/22	270	95	56	64	153	127	30	80	PF	1/4"	20	42	12	24	16	32
	F07/F10 Ø70/Ø102	M8/M10 24/22																
PA-115	F07/F10 Ø70/Ø102	M8/M10 29/27	316	97	64.5	74.5	181	145	30	80	PF	1/4"	30	62	12	24	16	32
	F07/F10 Ø70/Ø102	M8/M10 29/27																
PA-125	F10/F12 Ø102/Ø125	M10/M12 30/27	418	115	80	87	214	178	30	80/130	PF	1/4"	30	62	12	24	16	32
	F10/F12 Ø102/Ø125	M10/M12 30/27																
PA-160	F14 Ø140	M16 40/36	450	118	89	104	236	200	30	80/130	PF	1/4"	30	80	12	24	16	32
	F14 Ø140	M16 40/36																
PA-190	F16 Ø165	M20 50/46	628	160	130	130	328	292	30	130	PF	1/4"	30	90	12	24	16	32
	F16 Ø165	M20 50/46																
PA-210	F16 Ø165	M20 50/46	750	160	147	147	367	331	30	130	PF	1/2"	30	90	20	40	22.5	45
	F16 Ø165	M20 50/46																
PA-240	F16 Ø165	M20 50/46	772	180	161	172	390	354	30	130	PF	1/2"	30	90	20	40	22.5	45
	F16 Ø165	M20 50/46																
PA-270	F16/F25 Ø165/Ø254	M20/8-M16 50/46	860	270	190	190	346	410	30	130	PF	1/2"	30	90	20	40	22.5	45
	F16/F25 Ø165/Ø254	M20/8-M16 50/46																
PA-300	F16/F25 Ø165/Ø254	M20/8-M16 72/55	938	291	262	262	502	466	30	130	PF	1/2"	30	90	20	40	22.5	45
	F16/F25 Ø165/Ø254	M20/8-M16 72/55																

## ATC 120° /180° double acting actuators

120° /180° actuator outside dimension and connection size (double acting)

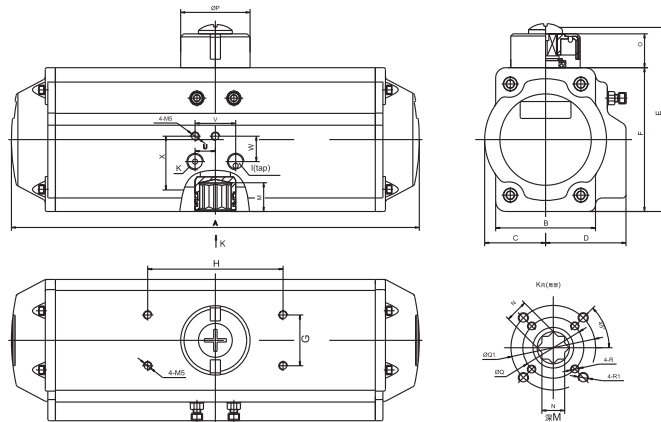

1. we can provide other item actuators according to your requirement
2. we can provide different stroke actuator ,such as 40°/60° etc

### Dimension

Model	FLANGE L(ISO5211)	R/R1	A <sub>(120)</sub>	A <sub>(180)</sub>	B	C	D	E	F	G	H	I	K	O	P	U	V	W	X
	Q/Q1	M/N(min)																	
ATC-50	F03/F05	M5/M6	207	225	47	29	41.5	95	69	30	80	PF	1/4"	20	42	12	24	16	32
	Ø36/Ø50	13/11																	
ATC-63	F03/F05	M5/M6	230	250	59	36	47.5	111	85	30	80	PF	1/4"	20	42	12	24	16	32
	Ø36/Ø50	16/14																	
ATC-75	F05/F07	M6/M8	300	330	68	43	51	128	102	30	80	PF	1/4"	20	42	12	24	16	32
	Ø50/Ø70	19/17																	
ATC-88	F05/F07	M6/M8	325	358	68	49.5	55.5	141	115	30	80	PF	1/4"	20	42	12	24	16	32
	Ø50/Ø70	20/17																	
ATC-100	F07/F10	M8/M10	360	400	95	56	64	153	127	30	80	PF	1/4"	20	42	12	24	16	32
	Ø70/Ø102	24/22																	
ATC-115	F07/F10	M8/M10	420	465	97	64.5	74.5	181	145	30	80	PF	1/4"	30	62	12	24	16	32
	Ø70/Ø102	24/22																	
ATC-125	F07/F10	M8/M10	470	520	97	69	78.5	193	157	30	80	PF	1/4"	30	62	12	24	16	32
	Ø70/Ø102	29/27																	
ATC-145	F10/F12	M10/M12	525	580	115	80	87	214	178	30	80/130	PF	1/4"	30	62	12	24	16	32
	Ø102/Ø125	30/27																	
ATC-160	F10/F12	M10/M12	570	630	118	89	104	236	200	30	80/130	PF	1/4"	30	80	12	24	16	32
	Ø102/Ø125	30/27																	
ATC-190	F14	M16	655	720	130	103	103	267	231	30	80/130	PF	1/4"	30	80	12	24	16	32
	Ø140	40/36																	
ATC-210	F14	M16	770	840	130	113	113	293	257	30	130	PF	1/4"	30	90	12	24	16	32
	Ø140	40/36																	
ATC-240	F16	M20	840	916	160	130	130	328	292	30	130	PF	1/4"	30	90	12	24	16	32
	Ø165	50/46																	
ATC-270	F16	M20	940	1020	160	147	147	367	331	30	130	PF	1/2"	30	90	20	40	22.5	45
	Ø165	50/46																	
ATC-300	F16	M20	1140	1230	180	161	168	390	354	30	130	PF	1/2"	30	90	20	40	22.5	45
	Ø165	50/46																	

## Three position pneumatic actuator

Three position pneumatic actuators have two kinds of models  $0^\circ -45^\circ -90^\circ$  or  $0^\circ -90^\circ -180^\circ$ . In intake 2, the piston moves to both ends after air inflow, it through both ends design has auxiliary piston produces mechanical constraints to realize the middle position. It can use outside ends adjusting bolt easily adjust intermediate position. Angle directly such as  $20^\circ$   $30^\circ$   $50^\circ$   $75^\circ$  or  $95^\circ$   $120^\circ$   $130^\circ$   $150^\circ$   $175^\circ$ , etc.



Three position pneumatic actuators which operating need to design a set of electromagnetic valve control loop system to complete the operation, the control principle is as follows:

Air pressure enters 2 hole and D hole at one time, then air from 4 hole and C hole is exhausted, 2 hole as internal piston movement, D hole through assisted piston push-rod limit internal piston positioning at a predetermined middle position.


Air pressure enters 2 hole and C hole at one time, then air from 4 hole and D hole is exhausted, 2 hole internal piston continues to move, C hole removes auxiliary piston push-rod limit positioning, it makes the internal piston smooth arrival in full-open position.

Air pressure enters 4 hole, then air from 2 hole is exhausted, internal piston moves to the middle direction then reaches full-closed position.

We can provide 0-45-90 spring return type specification. When lose air, or cut power (or air failure), it can return to full-closed position through the spring force inner piston.

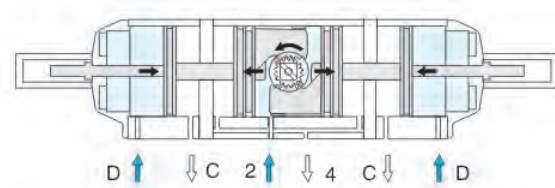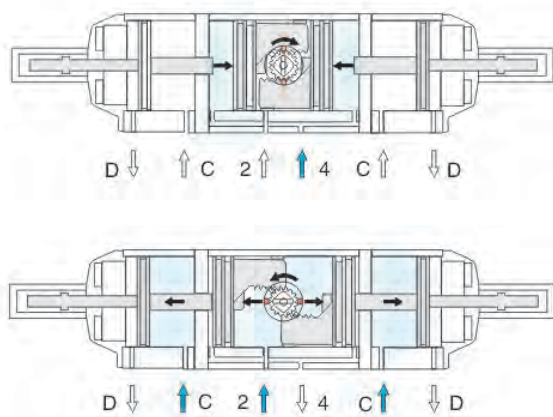

## Three position pneumatic actuator

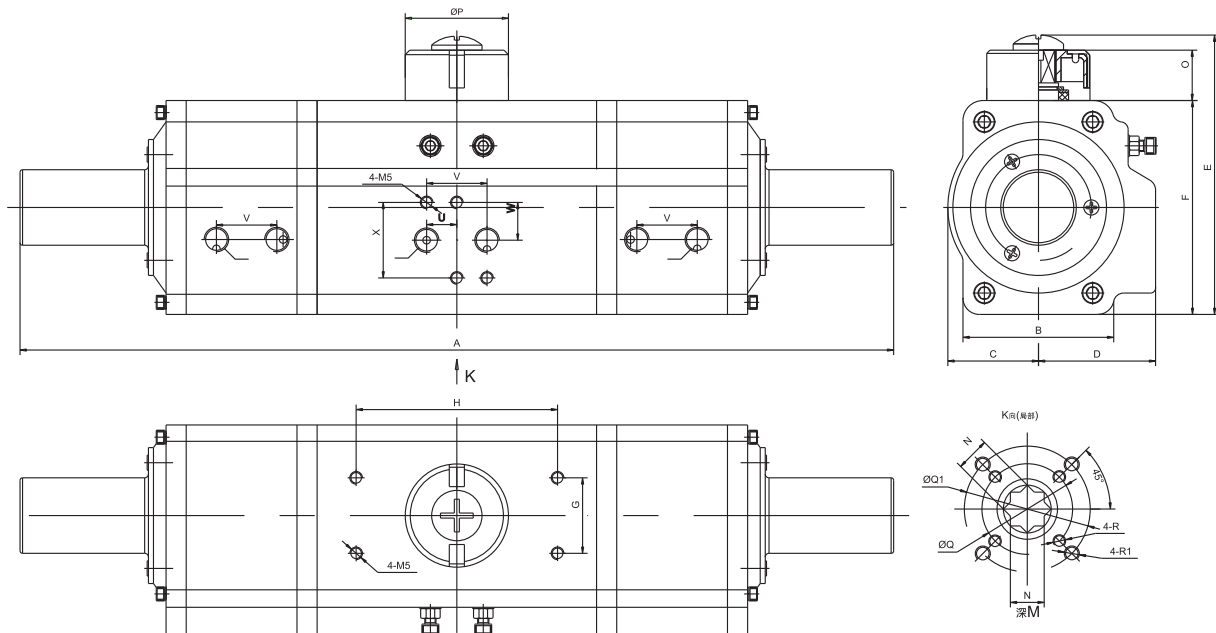

### Dimension

Model	FLANGE L(ISO5211)	R/R1	A	B	C	D	E	F	G	H	I	K	O	P	U	V	W	X
	Q/Q1	M/N(min)																
CT-63	F03/F05	M5/M6	347	59	36	47.5	111	85	30	80	PF	1/4"	20	42	12	24	16	32
	Ø36/Ø50	16/14																
CT-75	F05/F07	M6/M8	412	68	43	51	128	102	30	80	PF	1/4"	20	42	12	24	16	32
	Ø50/Ø70	19/17																
CT-88	F05/F07	M6/M8	538	68	49.5	55.5	141	115	30	80	PF	1/4"	20	42	12	24	16	32
	Ø50/Ø70	20/17																
CT-100	F07/F10	M8/M10	620	95	56	64	153	127	30	80	PF	1/4"	20	42	12	24	16	32
	Ø70/Ø102	24/22																
CT-115	F07/F10	M8/M10	686	97	64.5	74.5	181	145	30	80	PF	1/4"	30	62	12	24	16	32
	Ø70/Ø102	24/22																
CT-125	F07/F10	M8/M10	718	97	69	78.5	193	157	30	80	PF	1/4"	30	62	12	24	16	32
	Ø70/Ø102	29/27																
CT-145	F10/F12	M10/M12	760	115	80	87	214	178	30	80/130	PF	1/4"	30	62	12	24	16	32
	Ø102/Ø125	30/27																
CT-160	F10/F12	M10/M12	826	118	89	104	236	200	30	80/130	PF	1/4"	30	80	12	24	16	32
	Ø102/Ø125	30/27																
CT-190	F14	M16	892	130	103	103	267	231	30	80/130	PF	1/4"	30	80	12	24	16	32
	Ø140	40/36																

### GUARANTEE

All valves are guaranteed against any manufacturing defects for a period of 12 months from date of supply, provided the valves have not been misused, damaged or installed for services they are not recommended. The company shall be liable to furnish part / parts thereof or full valve as the company may deem fit.

## V.A. VALVES

ISO 9001-2008 Certified

Regd. Office & Works: Udyog Nagar, Gadaipur, Jalandhar City -144 004

Phone: +91-181-2601540, 2601541 Fax: +91-181-2601741

E-mail : marketing@vk-utam.com, info@vtm-valves.com

Website : [www.vtm-utam.com](http://www.vtm-utam.com), [www.vtm-valves.com](http://www.vtm-valves.com)

Due to continuous development program, design and data in this leaflet are subject to change without prior notice.

Authorized Stockist

Our associates:



PIONEERING FLUID CONTROLS